



Series 1510 Centrifugal Pumps – Technical Bulletin

- For hydronic heating and cooling systems, industrial, pressure boosting and general pumping applications
- High efficiency, low operating costs
- Easy maintenance
- Seal options

Part of the



Bell & Gossett



ITT Industries
Engineered for life

Table of Contents

Useful Pump Formulas	2
Standard Features	3
Technical Data	4
Materials of Construction	5
Selection Charts	6
Performance Curves	7
Centrifugal Pump Dimensions	8-9
The B&G End Suction Pump System	10
Typical Specifications	11

Useful Pump Formulas

$$\begin{aligned} \text{Pressure (PSI)} &= \frac{\text{Head (Feet)} \times \text{Specific Gravity}}{2.31} \\ \text{Head (Feet)} &= \frac{\text{Pressure (PSI)} \times 2.31}{\text{Specific Gravity}} \\ \text{Vacuum (Inches of Mercury)} &= \frac{\text{Dynamic Suction Lift (Feet)} \times .883}{\text{Specific Gravity}} \\ \text{Horsepower (Brake)} &= \frac{\text{GPM} \times \text{Head (Feet)} \times \text{Specific Gravity}}{3960 \times \text{Pump Efficiency}} \\ \text{Horsepower (Water)} &= \frac{\text{GPM} \times \text{Head (Feet)} \times \text{Specific Gravity}}{3960} \\ \text{Efficiency (Pump)} &= \frac{\text{Horsepower (Water)}}{\text{Horsepower (Brake)}} \times 100 \text{ Per Cent} \\ \text{NPSH (Available)} &= \text{Positive Factors} - \text{Negative Factors} \end{aligned}$$

Affinity Laws: Effect of change of speed or impeller diameter on centrifugal pumps.

	GPM Capacity	Ft. Head	BHP
Impeller Diameter Change	$Q_2 = \frac{D_2}{D_1} Q_1$	$H_2 = \left(\frac{D_2}{D_1}\right)^2 H_1$	$P_2 = \left(\frac{D_2}{D_1}\right)^3 P_1$
Speed Change	$Q_2 = \frac{\text{RPM}_2}{\text{RPM}_1} Q_1$	$H_2 = \left(\frac{\text{RPM}_2}{\text{RPM}_1}\right)^2 H_1$	$P_2 = \left(\frac{\text{RPM}_2}{\text{RPM}_1}\right)^3 P_1$

Where Q = GPM, H = Head, P = BHP, D = Impeller Dia., RPM = Pump Speed

Take away these seven standard features and you'll have a pump like everyone else's.



TRUE BACK PULLOUT

A B&G standard in design and construction. Ease in service is assured, while piping and motor remain undisturbed. Extended delays for repairs are virtually eliminated.

INTERNALLY SELF-FLUSHING MECHANICAL SEAL

This design is way ahead of its time. This unique seal design is proven in many years of service. It requires no special external flushing provisions, since the design provides for constant efficient flushing action internally.

This standard feature ensures maximum seal face lubrication, heat dissipation and debris removal without vulnerable, external flush tubing. The internal flushing action passes two and a half to three times the flow over the seal faces — compared to a few GPM for conventional, stuffing-box designed pumps.



COMPUTER CONTROLLED IMPELLER BALANCING

1510 impellers are balanced to HI/ANSI 1.1-1.5-1994 section 1.4.6.1.3.1, balance grade G6.3 standards. This method of computer balancing Impellers provides for quiet, efficient, vibration free performance. Diameters are computer selected at the factory to furnish assurance that your capacity requirements will be met.




HEAVY DUTY, RUGGED BASEPLATE

The Bell & Gossett fabricated heavy duty baseplate is supplied as standard on every Series 1510 pump. Unlike rolled steel and "C" channel baseplates, the Series 1510 baseplate provides a heavy duty saddle assembly, full seam welds, closed baseplate ends and an open top to provide ease of access for proper equipment grouting.


SOLID-FOOT MOUNTED VOLUTE

All Series 1510 pumps are provided as standard with an integrally cast volute foot located directly beneath the pump volute. This integrally cast foot ensures that the alignment between the volute and motor assembly is maintained. Without solid support beneath the volute, the piping weight alone will cause distortion which can lead to premature failure of the bearings, shaft and mechanical seal. This feature is equally important on hot water applications. The Series 1510 volute foot provides a solid foundation and eliminates the deflections which would otherwise exist within an unsupported overhung volute during the normal thermal expansion of the system piping against the volute.

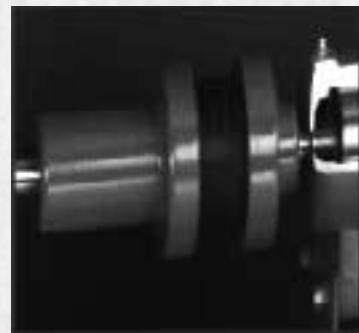

CENTER DROP-OUT SPACER COUPLING

Unlike conventional jaw type or rigid style couplings, a center drop-out spacer coupling allows removal of the bearing frame and rotating element without disturbing the pump end pipe alignment or motor electrical connections.

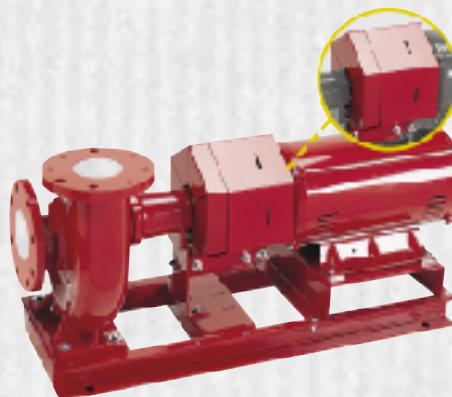

ANSI/OSHA-COMPLIANT COUPLING GUARD

The coupler guard complies with ANSI B15.1, Section 8 and OSHA 1910.219. The guard offers increased protection against potential injuries and is standard on all 1510 pumps. The guards include slotted viewing windows for easy inspection.

Technical Data

BALANCE STANDARDS

Impellers are balanced to Hydraulic Institute Standards (ANSI/HI 1.1-1.5-1994), section 1.4.6.1.3.1 Refer to Figure 1.106.

The allowable residual unbalance in the impeller rotating assembly conforms to ANSI grade G6.3.

ANSI Balance Quality Grades of G2.5 and G1 for the rotating assembly are also available. Consult your local Bell & Gossett Representative for additional details.

VIBRATION LIMITS

Series 1510 pumps conform to Hydraulic Institute ANSI/HI 1.1-1.5-1994, section 1.4.6.1.1 for recommended acceptable unfiltered field vibration limits (as measured at the pump bearings per H.I. 1.4.6.5.2, Figure 1.108.) for pumps with rolling contact bearings.

PUMP SPEED RPM	OVERALL DISPLACEMENT (Unfiltered) Peak to Peak-Mils (.001")
3600	2.2
1800	3.8
1200	5.8

SEISMIC CAPABILITIES

Series 1510 pumps are capable of withstanding a horizontal load of 0.5g* without adversely affecting pump operation.


*Piping and/or fasteners used to anchor the pump to the mounting pads on the floor are excluded.

MECHANICAL SEAL


Seal Features	
Standard Seal Type	B&G
Internally Flushed Seal	Yes
Enlarged Seal Chamber	Yes
Standard Seal Construction	Buna-Carbon-Ceramic
Standard Working Pressure	175 psig (12 Bar)
Maximum Working Pressure	250 psig (17 Bar)
Standard Seal Temperature Rating	225 deg F (107°C)
Optional Temperature Rating	250 deg F (121°C)

The ceramic material is 99.5% pure alumina oxide, ceramic seat hardness of 68 Rockwell C, or a tensile strength of 300,000 psi.

Materials of Construction

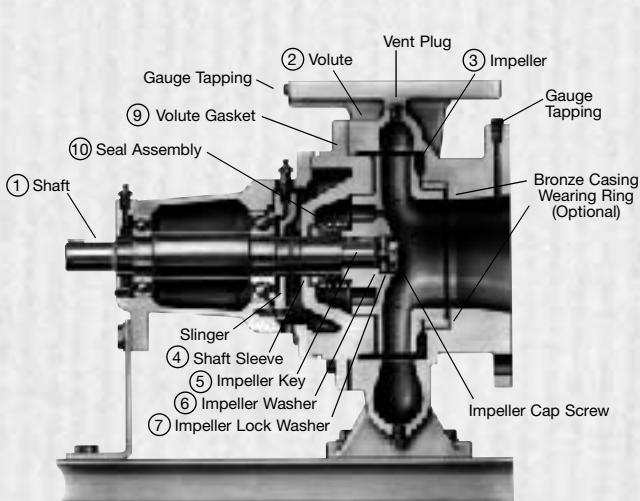

Standard Configuration

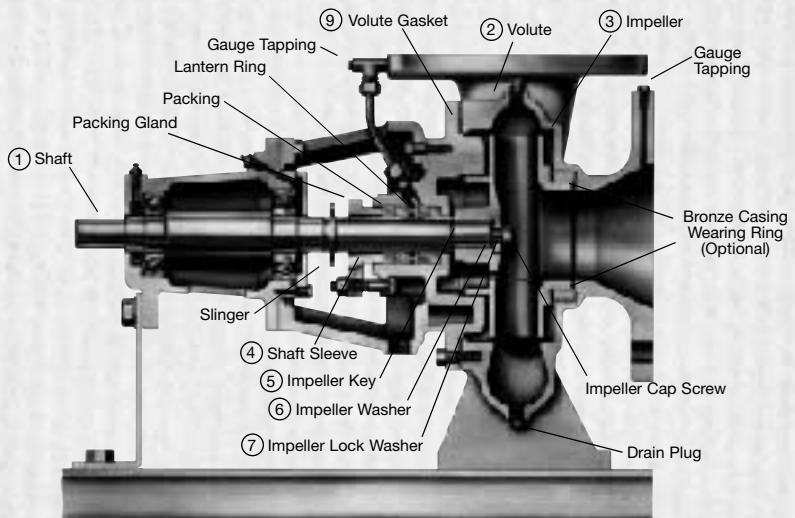

Optional -S Configuration

DESCRIPTION	BRONZE FITTED PUMP (STANDARD CONFIGURATION)	ALL IRON PUMP (OPTIONAL)	ALL BRONZE PUMP* (OPTIONAL)
1 Shaft	Steel SAE 1144	Steel SAE 1144	Steel SAE 1144
2 Volute	Cast Iron ASTM #A159	Cast Iron ASTM #A159	Cast Bronze ASTM #B584
3 Impeller	Cast Bronze ASTM #B584	Cast Iron ASTM #A159	Cast Bronze ASTM #B584
4 Shaft Sleeve	Aluminum Bronze ASTM #B111	#304 Stainless Steel ASTM #A312	Aluminum Bronze ASTM #B111
5 Impeller Key	#304 Stainless Steel	#304 Stainless Steel	#304 Stainless Steel
6 Impeller Washer	1510 – Steel	Stainless Steel	Brass
7 Impeller Lock Washer	#304 Stainless Steel	#304 Stainless Steel	#304 Stainless Steel
8 Impeller Cap Screw	#304 Stainless Steel	#304 Stainless Steel	#304 Stainless Steel
9 Volute Gasket	Cellulose Fiber	Cellulose Fiber	Cellulose Fiber
10 Seal Assemblies			
Standard Seal			
Bellows	Buna N	Buna N	Buna N
Faces	Carbon-Ceramic	Carbon-Ceramic	Carbon-Ceramic
Metal Parts	Brass	Stainless Steel	Brass
Spring	Stainless Steel	Stainless Steel	Stainless Steel
For Stuffing Box			
10A Flushed Single O-Rings	EPR	EPR	
Faces	Carbon-Tungsten Carbide	Carbon-Tungsten Carbide	
Metal Parts	Stainless Steel	Stainless Steel	
Spring	Stainless Steel	Stainless Steel	
Packed			
Packing	Graphited	Graphited	
Gland	Impregnated Teflon	Impregnated Teflon	
Lantern Ring	Bronze	Cast Iron	
	Filled TFE	Filled TFE	

OPTIONAL FEATURES

All Iron Construction
All Bronze Construction*
Bronze Casing Wear Ring
Stainless Steel Shaft Sleeve
Stainless Steel Shaft
Drip Pan
EPT/Tungsten Carbide Seal (Standard Configuration only)
Stuffing Box Construction with several seal and packing options

SEAL SELECTION GUIDE FOR:

A. STANDARD SEALS

- BUNA-PH Limitations 7-9; Temperature Range -20°F to +225°F
- EPT-PH Limitations 7-11; Temperature Range -20°F to +250°F
For use on open or closed clear water systems. Maximum working pressure 175 psi.

B. FLUSHED SINGLE SEALS (Stuffing Box Design)

- PH Limitations 7-11; Temperature Range -20°F to +300°F**
For use on closed or open systems where the temperature or pressure requirements exceed the limitations of the standard seal. Available in 175 psi, or 250 psi working pressures.

C. FLUSHED DOUBLE SEALS (Stuffing Box Design)

- PH Limitations 7-9;
Temperature Range 0°F to +250°F
For use on closed or open low pressure systems which may contain a high concentration of abrasives. An external flush is required. Maximum working pressure 175 psi.

D. PACKING (Stuffing Box Design)


- PH Limitations 7-9;
Temperature Range 0°F to +190°F
For use on open or closed systems which require a large amount of make-up water, as well as systems which are subjected to widely varying chemical conditions and solids buildup.

* All Bronze Construction NOT available in following sizes: 1½AC, 3AC, 3BC, 4AC, 5A, 4BC, 5BC, 6BC, all E, and all G sizes, or stuffing box configuration.


** For operating temperatures above 250°F, a cooled flush is required – and is recommended for temperatures above 225°F for optimum seal life. On closed systems, cooling is accomplished by inserting a small heat exchanger in the flush line to cool the fluid. Flush-line Filters and Sediment Separators are available on special request.

Selection Charts



60 Hz

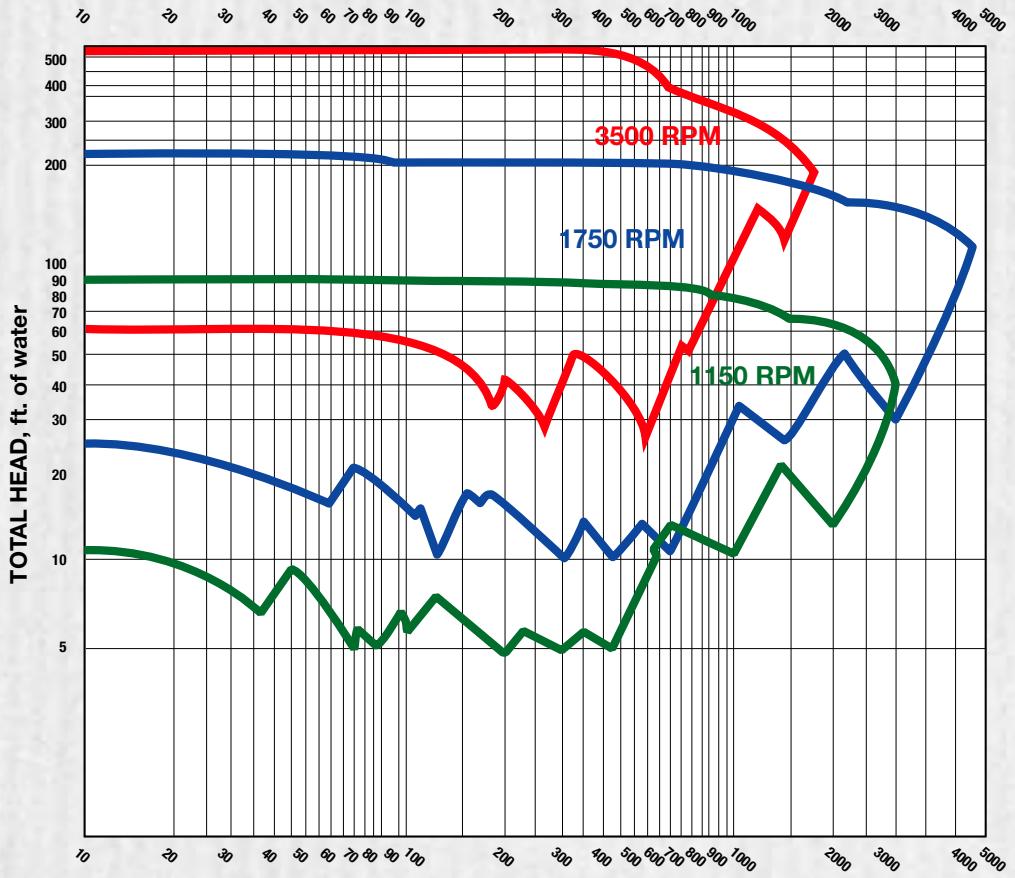

50 Hz

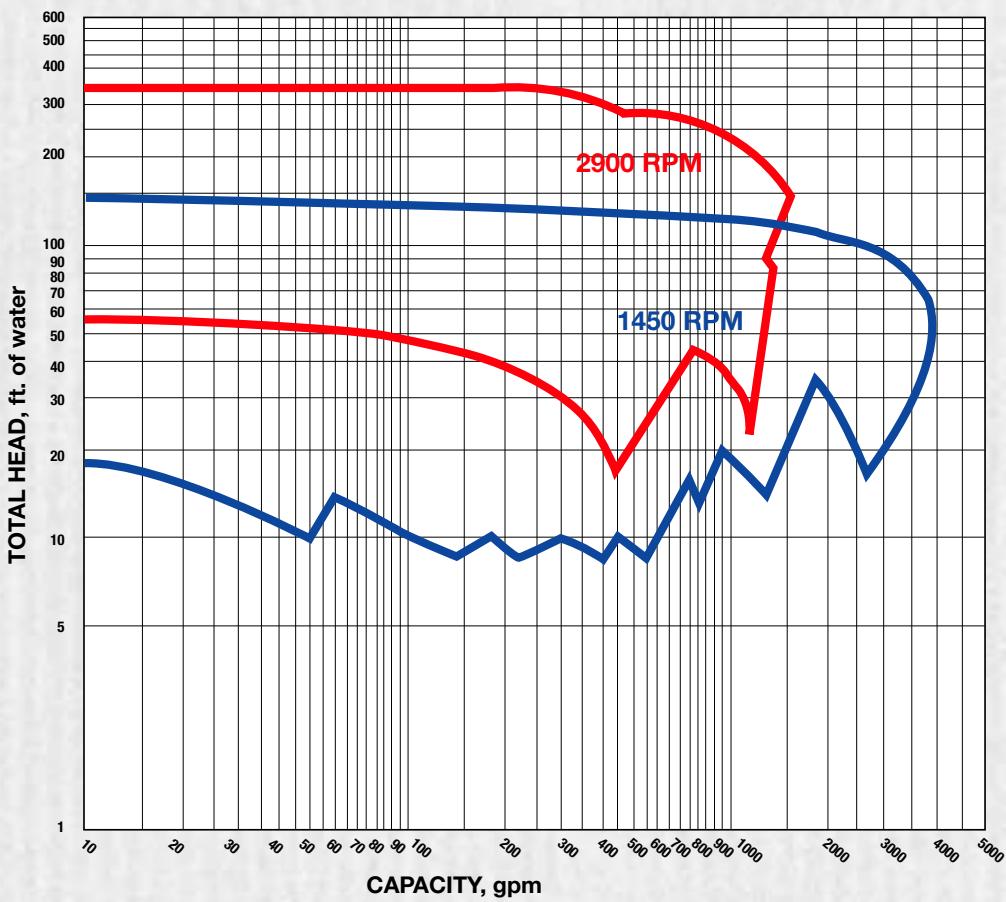


Series 1510 Performance Curves

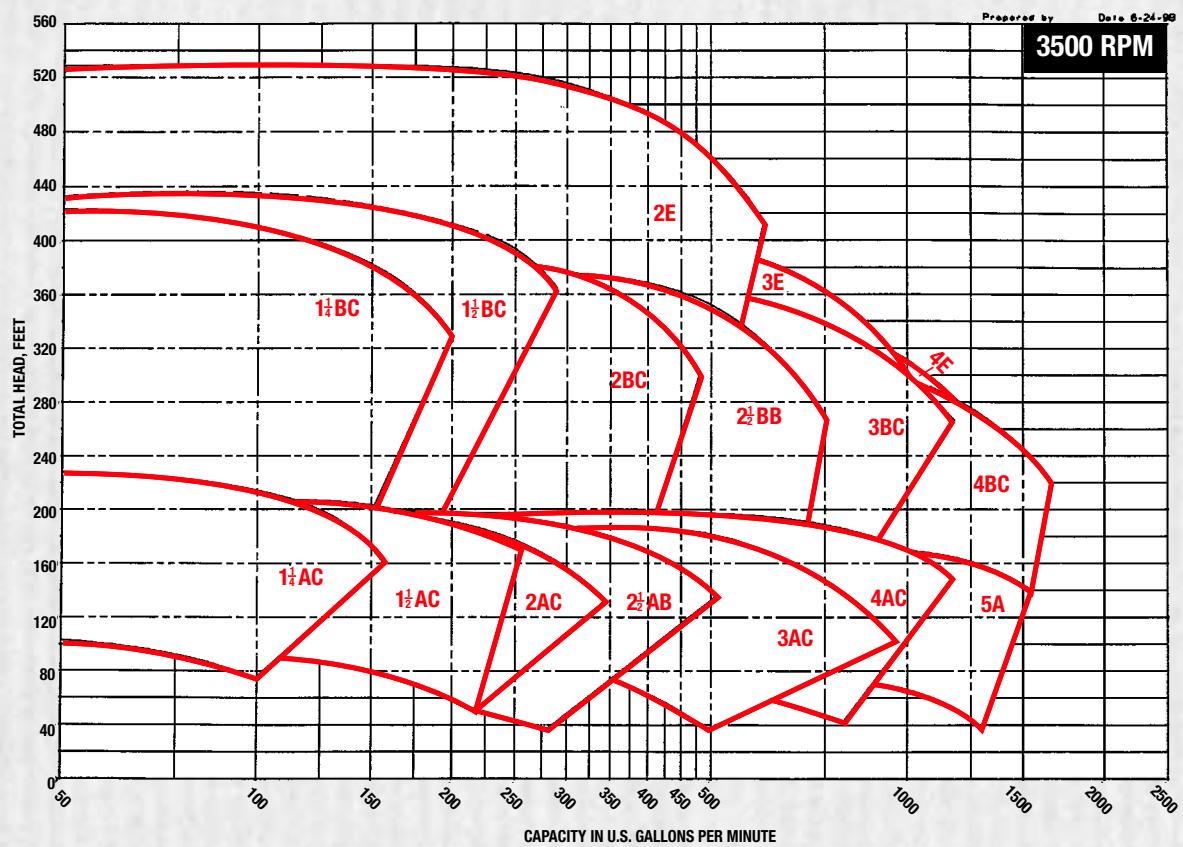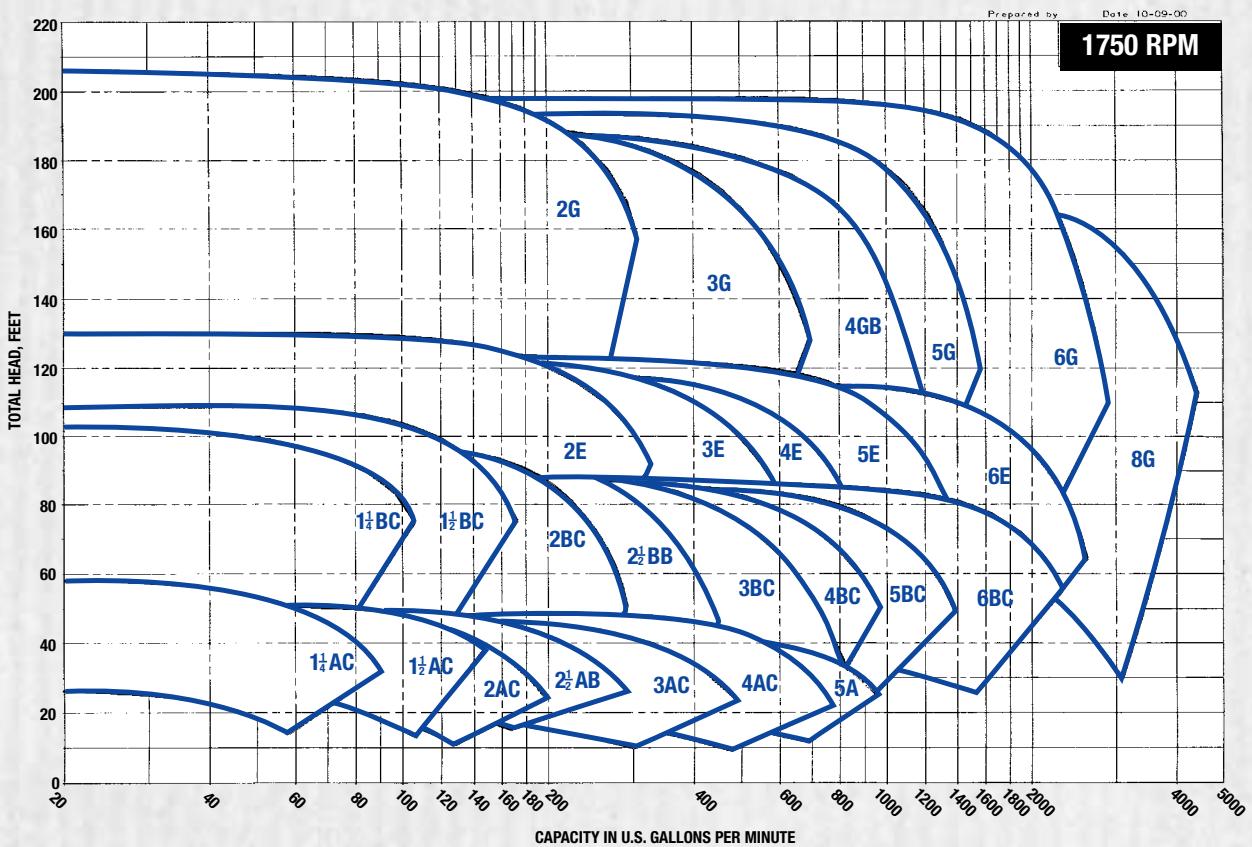

Series 1510 Centrifugal Pumps

Dimensions

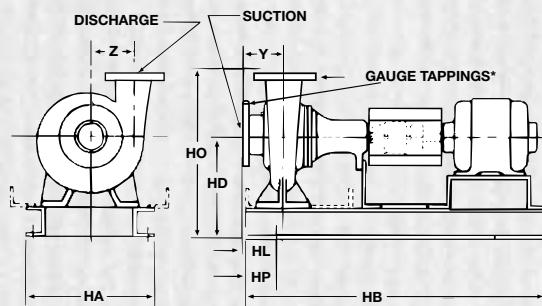

Motor Horsepower and Frame Tabulation three phase (Driproof Enclosure)

Horsepower	Frame @ 1750 RPM	Frame @ 3500 RPM	Horsepower	Frame @ 1750 RPM	Frame @ 3500 RPM
1/2	56		20	256T	254T
3/4	56		25	284T	256T
1	143T		30	286T	284TS
1 1/2	145T		40	324T	286TS
2	145T	145T	50	326T	324TS
3	182T	145T	60	364T	326TS
5	184T	182T	75	365T	364TS
7 1/2	213T	184T	100	404TS	365TS
10	215T	213T	125	—	404TS
15	254T	215T			

*Gauge Tapping Sizes: 1/8" for NPT, 1/4" for flanged sizes

DIMENSIONS – INCHES (MM)			STANDARD MECHANICAL SEAL PUMP MODEL 1510, 1510-F							STUFFING BOX CONSTRUCTION PUMP MODEL 1510-PF, 1510-S										
PUMP SIZE DISCHARGE	SUCTION SIZE	MOTOR FRAME SIZE	HA	HB	HD	HL	HO	HP	Y	Z	HA	HB	HD	HL	HO	HP	Y	Z		
1 1/4 AC (NPT)	1 1/2 (NPT)	56	12 (305)	28 1/4 (730)	9 1/4 (248)	3 1/8 (79)	14 1/4 (375)	3 (76)	4 1/2 (114)	34 1/8 (879)	9 1/4 (248)	1 1/4 (44)	14 3/4 (375)	3 (76)	4 1/2 (114)	3 1/4 (83)	4 1/2 (114)			
		143T-145T	31 (787)		1 1/4 (46)					39 1/4 (1000)						3 1/4 (83)				
		182T-184T								34 1/8 (879)		10 1/4 (273)	1 1/8 (476)			5 1/2 (140)				
		213T-215T								18 1/4 (476)						16 (406)	46 1/2 (1181)			
		143T-145T	31 (787)		10 1/4 (273)	1 1/8 (46)	20 (508)	5 (127)	16 (406)	12 (305)	2 1/8 (75)	20 (508)	5 (127)	13 (330)	21 (533)	5 1/2 (140)				
		182T-184T								21 (533)										
1 1/4 BC (NPT)	1 1/2 (NPT)	213T-215T															3 1/4 (83)			
		254T-256T	16 (406)	46 1/2 (1181)	12 (305)	2 1/8 (75)	20 (508)	5 (127)	16 (406)	51 1/4 (1314)	13 (330)	2 1/8 (75)	20 (508)	5 (127)	13 (330)	21 (533)	5 1/2 (140)			
		284TS-286TS								13 (330)										
		56	12 (305)	28 1/4 (730)	9 1/4 (248)	3 1/8 (78)	15 1/4 (400)	3 (76)	4 1/2 (117)	34 1/8 (879)	9 1/4 (248)	1 1/16 (43)	15 1/4 (400)	3 (76)	4 1/2 (117)	3 1/4 (83)	4 1/2 (117)			
		143T-145T	31 (787)							39 1/4 (1000)										
		182T-184T								34 1/8 (879)										
1 1/2 AC (NPT)	2 (NPT)	213T-215T															3 1/8 (79)			
		254T-256T															5 1/4 (146)			
		143T-145T	14 1/2 (371)	31 (787)	10 1/4 (273)	1 1/8 (43)	18 1/4 (438)	3 (76)	4 1/2 (117)	34 1/8 (879)	9 1/4 (248)	1 1/16 (43)	15 1/4 (400)	3 (76)	4 1/2 (117)	3 1/4 (83)	4 1/2 (117)			
		182T-184T								39 1/4 (1000)										
		213T-215T								34 1/8 (879)										
		254T-256T	16 (406)	46 1/2 (1181)	12 (305)	2 1/8 (71)	18 1/4 (470)	5 (127)	16 (406)	12 (305)	2 1/8 (71)	18 (457)	5 (127)	13 (330)	19 1/4 (495)	5 (127)	3 1/8 (79)	5 1/4 (146)		
		284TS-286TS								13 (330)		19 1/4 (495)								
2 AC	2 1/2	56	12 (305)	28 1/4 (730)	9 1/4 (248)	3 1/8 (90)	16 1/4 (413)	3 (76)	4 1/2 (121)	34 1/8 (879)	9 1/4 (248)	2 1/8 (56)	16 1/4 (413)	3 (76)	4 1/2 (121)	3 1/4 (89)	4 1/2 (121)			
		143T-145T	31 (787)							39 1/4 (1000)										
		182T-184T								34 1/8 (879)										
		213T-215T															3 1/4 (89)	4 1/2 (121)		
		254T-256T																		
		143T-145T	14 1/2 (371)	31 (787)	10 1/4 (273)	2 1/8 (68)	17 1/4 (451)	5 (127)	4 (102)	4 1/2 (371)	34 1/8 (879)	10 1/4 (273)	2 1/8 (68)	17 1/4 (451)	5 (127)	4 (102)	5 1/4 (146)	4 (102)	5 1/4 (149)	
2 BC	3	182T-184T								39 1/4 (1000)										
		213T-215T-1750								34 1/8 (879)		19 (483)	12 (305)	3 1/8 (97)	19 (483)	5 (127)	4 (102)	4 1/2 (1181)	4 (102)	5 1/4 (149)
		254T-3500								39 1/4 (1000)		20 (508)	12 (305)	3 1/8 (97)	20 (508)					
		254T-256T	16 (406)	46 1/2 (1181)	12 (305)	2 1/8 (97)	18 1/4 (470)			19 (483)		12 (305)	2 1/8 (71)	19 (483)						
		284TS-286TS								13 (330)										
		324TS-326TS								13 (330)										
2 ET†	3	182T																		
		184T																		
		213T																		
		215T																		
		254T																		
		286TS	16 (406)	46 1/2 (1181)	10 (356)	6 1/2 (165)	22	5 (127)	5 (140)	6 1/2 (165)	34 1/8 (879)	9 1/4 (248)	2 1/8 (56)	14 1/2 (406)	5 (140)	6 1/2 (165)	22	5 (127)	6 1/2 (165)	
2 G†	3	324TS						39 1/4 (1000)												
		326TS						34 1/8 (879)												
		364TS	24 (610)	56 (1422)	16 1/2 (419)	4 1/8 (121)	24 1/2 (622)	6 (152)		24 (610)	56 (1422)	16 1/2 (419)	4 1/8 (121)							
		365TS						39 1/4 (1000)												
		213T-215T	16 (406)	46 1/2 (1181)	14 (356)	3 1/8 (98)	23	5 (127)	7 1/4 (184)	14 (356)	34 1/8 (879)	9 1/4 (248)	2 1/8 (56)	14 1/2 (406)	7 1/4 (184)	14 (356)	23	5 (127)	7 1/4 (184)	
		284T						39 1/4 (1000)												
2 1/2 AB	4	56	12 (305)	28 1/4 (730)	9 1/4 (248)	4 1/8 (111)	15 1/4 (400)	3 (76)	4 1/2 (108)	34 1/8 (879)	9 1/4 (248)	3 1/8 (76)	14 1/2 (406)	3 (76)	4 1/2 (108)	3 1/4 (108)	4 1/2 (108)			
		143T-145T	31 (787)							39 1/4 (1000)										
		182T-184T								34 1/8 (879)										
		213T-215T																		
		254T-256T																		
		182T-184T	14 1/2 (371)	31 (787)	10 (356)	2 1/8 (70)	17 1/2 (445)	5 (127)	4 (102)	14 1/2 (371)	34 1/8 (879)	10 1/4 (273)	2 1/8 (70)	17 1/2 (445)	5 (127)	4 (102)	3 1/4 (105)	4 1/2 (108)		
2 1/2 BB	4	213T-215T								39 1/4 (1000)		19 1/4 (502)	5 (127)							
		284TS-286TS	16 (406)	46 1/2 (1181)	13 (330)	3 1/8 (98)	19 1/4 (502)</td													


Series 1510 Centrifugal Pumps cont.'d

DIMENSIONS - INCHES (MM)			STANDARD MECHANICAL SEAL PUMP MODEL 1510, 1510-F								STUFFING BOX CONSTRUCTION PUMP MODEL 1510-PF, 1510-S										
PUMP SIZE DISCHARGE	SUCTION SIZE	MOTOR FRAME SIZE	HA	HB	HD	HL	HO	HP	Y	Z	HA	HB	HD	HL	HO	HP	Y	Z			
3 BC	4	182T-184T	31(787) (371)	10 ¹ / ₁₆ (273)	3 ¹ / ₁₆ (94)	18 ¹ / ₄ (464)	3 (76)	4 ³ / ₄ (121)	6 ¹ / ₈ (156)	14 ⁵ / ₁₆ (371)	34 ⁵ / ₁₆ (879) 39 ⁵ / ₁₆ (1000)	10 ¹ / ₄ (94)	3 ¹ / ₁₆ (464)	18 ¹ / ₄ (464)	3 (76)	4 ³ / ₄ (121)	6 ¹ / ₈ (156)				
		213T-215T	34 ⁵ / ₁₆ (870) 39 ⁵ / ₁₆ (1000)							16 (406)	46 ¹ / ₁₆ (181)	12(305)	4 ⁵ / ₁₆ (122)	19 ¹ / ₄ (495)	19 ¹ / ₄ (495)						
		254T													20 ¹ / ₄ (521)	5 (127)					
		284TS-286TS	46 ¹ / ₁₆ (1181)	13(330) 12(305)	4 ¹⁵ / ₁₆ (122)	20 ¹ / ₂ (521) 19 ¹ / ₄ (495)									19 ¹ / ₄ (495)	5 (127)					
3 ET†		184T						5 (127)	5 ¹ / ₂ (140)	16 (406)	42 ¹ / ₄ (1073)		14 (356)	6 ¹ / ₁₆ (170)	23 ¹ / ₂ (597)	6 ¹ / ₁₆ (170)	23 ¹ / ₂ (597)	5 (127)	5 ¹ / ₂ (187)		
		213T-215T	42 ¹ / ₄ (1073)		14 (356)	6 ¹ / ₁₆ (170)					42 ¹ / ₄ (1073)		14 (356)	6 ¹ / ₁₆ (170)	23 ¹ / ₂ (597)	5 (127)	5 ¹ / ₂ (187)				
		254T													4 ⁵ / ₁₆ (110)						
		256T	46 ¹ / ₁₆ (1181)		4 ⁵ / ₁₆ (110)										4 ⁵ / ₁₆ (110)						
3 GT†		326TS	51 ¹ / ₄ (1314)					24 (610)	5 ¹ / ₂ (143)	16 (406)	51 ¹ / ₄ (1314)		14 (356)	16 ¹ / ₂ (419)	16 ¹ / ₂ (125)	26 (660)	6 (152)	5 ¹ / ₂ (143)	8 (203)		
		364TS-365TS	24 (610)	56 (1422)	16 ¹ / ₂ (419)	4 ¹⁵ / ₁₆ (125)	26				51 ¹ / ₄ (1314)		14 (356)	4 ¹ / _{8 (105)}	23 ¹ / ₂ (597)	5 (127)	5 ¹ / ₂ (143)	8 (203)			
		404TS																			
		213T-215T	46 ¹ / ₂ (1181)		14 (356)	4 ¹ / _{8 (105)}	23 ¹ / ₂ (597)														
4 AC†	5	213T	39 ⁵ / ₁₆ (1000)					5 ¹ / ₂ (146)	16 (406)	4 ¹⁵ / ₁₆ (125)	14 ⁵ / ₁₆ (371)	34 ⁵ / ₁₆ (879)	10 ¹ / ₄ (273)	4 ¹ / _{8 (110)}	18 ¹ / ₄ (464)	3 (76)	4 ¹⁵ / ₁₆ (125)	5 ¹ / ₂ (146)			
		215T										39 ⁵ / ₁₆ (1000)		12(305)	46 ¹ / ₁₆ (181)	12 (305)	5 ¹ / ₂ (495)				
		254T-256T	16 (406)	46 ¹ / ₁₆ (1181)	12(305)	5 ¹ / ₂ (138)	19 ¹ / ₂ (495)				51 ¹ / ₄ (1314)	13(330)	5 ¹ / ₂ (138)	20 ¹ / ₄ (521)	12(305)	5 (127)					
		284TS-286TS										19 ¹ / ₄ (495)		19 ¹ / ₄ (495)							
4 BC		324TS-326TS						5 (127)	7 (178)	16 (406)	46 ¹ / ₁₆ (1181)	12(305)	5 ¹ / ₂ (138)	13(330)	5 ¹ / ₂ (138)	20 ¹ / ₄ (521)	5 (127)	N/A	5 (127)	7 (178)	
		213T-215T	14 ⁵ / ₁₆ (371)	34 ⁵ / ₁₆ (870)	12 ³ / ₄ (324)	4 (102)	20 ¹ / ₄ (527)				51 ¹ / ₄ (1314)	13(330)	5 ¹ / ₂ (138)	20 ¹ / ₄ (521)	12(305)	5 (127)					
		254T	39 ⁵ / ₁₆ (1000)		14 (356)	5 ¹ / ₂ (130)	22			51 ¹ / ₄ (1314)	14 (356)	5 ¹ / ₂ (130)	22								
		286TS	16 (406)	46 ¹ / ₁₆ (1181)	14 (356)	5 ¹ / ₂ (130)	22		51 ¹ / ₄ (1314)	14 (356)	5 ¹ / ₂ (130)	22									
4 ET†	6	324TS-326TS						5 (127)	7 (184)	16 (406)	51 ¹ / ₄ (1314)	14 (356)	6 ¹ / ₁₆ (170)	23 ³ / ₄ (603)	5 (127)	16 (406)	5 ¹ / ₂ (141)	16 (406)	5 ¹ / ₂ (141)	7 (184)	
		364TS-365TS	24 (610)	56 (1422)	16 ¹ / ₂ (419)	4 ¹⁵ / ₁₆ (125)	26 ¹ / ₄ (667)				51 ¹ / ₄ (1314)	15 (381)	6 ¹ / ₁₆ (170)	23 ³ / ₄ (603)	5 (127)						
		404TS													5 ¹ / ₂ (110)						
		213T-215T	46 ¹ / ₁₆ (1181)	15 (381)	5 ¹ / ₂ (137)	25					51 ¹ / ₄ (1314)	15 (381)	6 ¹ / ₁₆ (170)	23 ³ / ₄ (603)	5 (127)						
4 GB		254T-256T	16 (406)	46 ¹ / ₁₆ (1181)	15 (381)	5 ¹ / ₂ (137)	25		6 (152)	8 ¹ / ₁₆ (217)	16 (406)	46 ¹ / ₁₆ (1181)	12(305)	5 ¹ / ₂ (1314)	14 (356)	6 ¹ / ₁₆ (170)	23 ³ / ₄ (603)	5 (127)	5 ¹ / ₁₆ (141)	7 (184)	
		284T-286T										51 ¹ / ₄ (1314)	15 (381)	6 ¹ / ₁₆ (170)	23 ³ / ₄ (603)	5 (127)					
		324TS-326TS												5 ¹ / ₂ (110)							
		364TS-365TS	24 (610)	56 (1422)	16 ¹ / ₂ (419)	4 ¹⁵ / ₁₆ (125)	26 ¹ / ₄ (667)	51 ¹ / ₄ (1314)				15 (381)	6 ¹ / ₁₆ (170)	23 ³ / ₄ (603)	5 (127)						
5 AT†	6	182T-184T	14 ⁵ / ₁₆ (371)	31(787) 34 ⁵ / ₁₆ (870)	12 ³ / ₄ (324)	5 ¹ / ₂ (146)	21 ¹ / ₄ (540)	3 (76)	5 ¹ / ₂ (148)	6 ¹ / ₄ (159)	16 (406)	14 ⁵ / ₁₆ (371)	34 ⁵ / ₁₆ (879)	12 ³ / ₄ (324)	5 ¹ / ₂ (146)	21 ¹ / ₄ (540)	3 (76)	5 ¹ / ₁₆ (148)	6 ¹ / ₄ (159)		
		213T-215T										39 ⁵ / ₁₆ (1000)		12(305)	51 ¹ / ₄ (1314)	14 (356)	6 ¹ / ₈ (175)	22 ¹ / ₂ (572)			
		254T-256T	16 (406)	46 ¹ / ₁₆ (1181)	14 (356)	6 ¹ / ₈ (175)	22 ¹ / ₂ (572)					46 ¹ / ₁₆ (1181)	12(305)	51 ¹ / ₄ (1314)	14 (356)	6 ¹ / ₈ (175)	22 ¹ / ₂ (572)				
		284TS-286TS												5 ¹ / ₂ (114)							
5 ET†		324TS-326TS						5 (127)	7 (191)	16 (406)	51 ¹ / ₄ (1314)	15 (381)	6 ¹ / ₈ (164)	25							
		364TS-365TS										46 ¹ / ₁₆ (1181)	15 (381)	5 ¹ / ₂ (1314)	15 (381)	6 ¹ / ₈ (164)	25				
		324T-326T												4 ⁷ / ₁₆ (114)							
		364T-365T												4 ⁷ / ₁₆ (114)							
6 BC†	8	254T-256T	16 (406)	46 ¹ / ₁₆ (1181)	15 (381)	8 ¹ / ₁₆ (213)	25 ¹ / ₂ (648)	5 (127)	7 (191)	16 (406)	5 ¹ / ₂ (148)	7 (178)	8 ¹ / ₁₆ (210)	16 ¹ / ₂ (648)	5 ¹ / ₂ (127)	25 ¹ / ₂ (648)	5 (127)	7 (191)	8 ¹ / ₁₆ (210)		
		284T-286T										51 ¹ / ₄ (1314)	15 (381)	6 ¹ / ₈ (164)	25 ¹ / ₂ (648)	5 (127)					
		324T-326T												4 ⁷ / ₁₆ (114)							
		364T-365T												4 ⁷ / ₁₆ (114)							
6 ET†		404TS																			
		254T-256T																			
6 G†*		284T-286T	24 (610)	56 (1422)	16 ¹ / ₂ (419)	6 ¹ / ₄ (159)	30 ¹ / ₂ (775)	6 (152)	6 ¹ / ₂ (165)	24 (610)	56 (1422)	9 ⁷ / ₁₆ (237)	24 (610)								

THE B&G End Suction Pump System

Consists of:

B&G Series 1510 Pump
B&G Triple Duty Valve
B&G Suction Diffuser

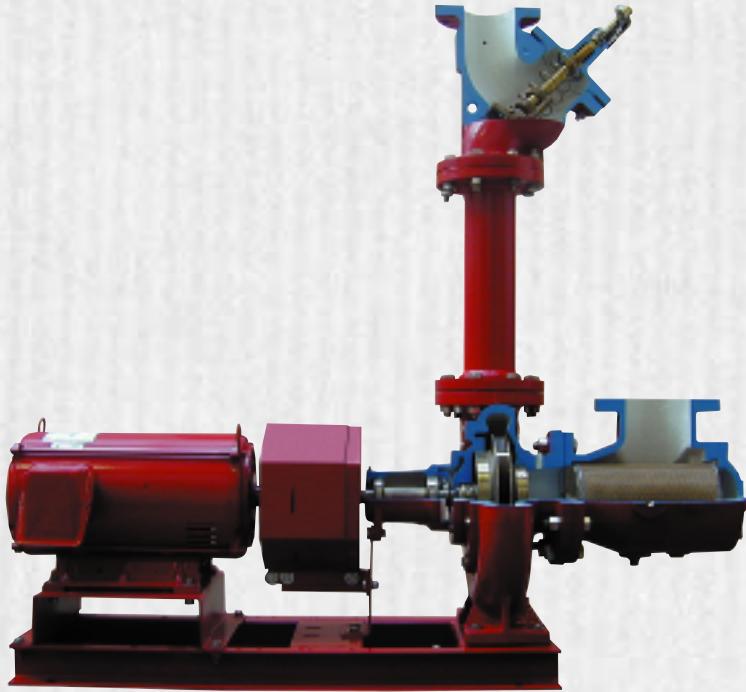

Triple Duty Valve

- Lowest Pressure Drop
- ASHRAE 90.1 Energy Efficient Design
- Three Valves in one!
 - Nonslam drip-tight check valve
 - Positive shutoff valve
 - Calibrated system balance valve
- EPDM Disc Soft Seat Design
- Repack Under Pressure
- Brass Seat & Bronze Disc
- Stainless Steel Stem
- Multi-turn Valve (8-9 turns) vs 1/4 turn range of control
- Available connections
 - Threaded – Flanged – Grooved
- ESP-Plus System Selection



Suction Diffuser

- Full length stainless steel straightening vanes
- Oversize cylinder assures minimum strainer pressure drop
- Pressure gauge tap
- Magnetic drain plug to protect pump seals
- Adjustable support foot
- Space saving design reduces the “footprint” size of the unit
- Available connections
 - Threaded – Flanged – Grooved
- Reducer and elbow provide multiple combinations of inlet and pump suction configurations which eliminate the need for reducer fittings
- ESP-Plus System Selection

Typical Specification for Series 1510 Base Mounted, Flexible Coupled, End-Suction Pumps

Furnish and install pumps with performance characteristics as shown on plans. Pumps shall be base mounted, single stage, end suction design with a foot mounted volute to allow removal and service of the entire rotating assembly without disturbing the pump piping, electrical motor connections or pump to motor alignment.

Pump volute shall be Class 30 cast iron with integrally-cast pedestal support feet. The impeller shall be cast bronze enclosed type, balanced to ANSI/HI 1.1-1.5-1994, section 1.4.6.1.3.1, figure 1.106, balance grade G6.3 and keyed to the shaft and secured by a locking capscrew.

The liquid cavity shall be sealed off at the pump shaft by an internally-flushed mechanical seal with ceramic seal seat and carbon seal ring, suitable for continuous operation at 225°F (107°C). A replaceable bronze shaft sleeve shall completely cover the wetted area under the seal.

Pump shall be rated for minimum of 175 psi (12 bar) working pressure. Volute shall have gauge tappings at the suction and discharge nozzles and vent and drain tappings at the top and bottom.

The pump(s) vibration limits shall conform to Hydraulic Institute ANSI/HI 1.1-1.5-1994, section 1.4.6.1.1 for recommend acceptable unfiltered field vibration limits (as measured per HI 1.4.6.5.2, Figures 1.108) for pumps with rolling contact bearings.

Baseplate shall be of structural steel or fabricated steel channel with fully enclosed sides and ends, and securely welded cross members. Grouting area shall be fully open. The combined pump and motor baseplate shall be sufficiently stiff as to limit the susceptibility of vibration. The minimum baseplate stiffness shall conform to ANSI/HI 1.3.4-1997 for *Horizontal Baseplate Design* standards.

The seismic capability of the pump shall allow it to withstand a horizontal load of 0.5g, excluding piping and/or fasteners used to anchor the pump to mounting pads or to the floor, without adversely affecting pump operation.

A flexible type, center drop-out design coupler, capable of absorbing torsional vibration, shall be employed between the pump and motor. Pumps for variable speed application shall be provided with a suitable coupler sleeve. The coupling shall be shielded by a dual rated ANSI B15.1, Section 8 & OSHA 1910.219 compliant coupling guard and contain viewing windows for inspection of the coupling.

Motor shall meet NEMA and EPACT '92 (where applicable) specifications and shall be of the size, voltage and enclosure called for on the plans. Pump and motor shall be factory aligned, and shall be realigned by the contractor per factory recommendations after installation.


The pump(s) selected shall conform to ANSI/HI 9.6.3.1 standards for Preferred Operating Region (POR) unless otherwise approved by the engineer. The pump NPSH shall conform to the ANSI/HI 9.6.1-1997 standards for *Centrifugal and Vertical Pumps for NPSH Margin*.

Each pump shall be factory hydrostatically tested per Hydraulic Institute standards. It shall then be thoroughly cleaned and painted with at least one coat of high grade paint prior to shipment.

The pump(s) shall be manufactured, assembled and tested in an ISO 9001 approved facility.

Pumps shall be Series 1510 as manufactured by ITT Bell & Gossett or equal.

**FOR MORE INFORMATION, CONSULT YOUR LOCAL
ITT BELL & GOSSETT REPRESENTATIVE**



**ISO 9001
Certified**

Bell & Gossett

© COPYRIGHT 1973, 2000 BY ITT INDUSTRIES, INC.
PRINTED IN U.S.A. 12-00

USA

Bell & Gossett
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847) 966-3700
Facsimile: (847) 966-9052
<http://www.bellgossett.com>

INTL.

Bell & Gossett / Export Dept.
8200 N. Austin Avenue
Morton Grove, IL 60053
Phone: (847) 966-3700
Facsimile: (847) 966-8366
<http://www.bellgossett.com>

CANADA

Fluid Products Canada
55 Royal Road
Guelph, Ontario,
N1H 1T1, Canada
Phone: (519) 821-1900